



IQG

EXCHANGING HAS NEVER BEEN EASIER

Inductive proximity sensors

SICK
Sensor Intelligence.

IQG: EXCHANGING HAS NEVER BEEN EASIER.



The IQG inductive proximity sensor allows you to enjoy all of the advantages offered by SICK in a matter of seconds. This is thanks to its unique, patented sturdy push-lock system, which is compatible with a large number of brackets. It has never been quicker or easier to exchange corner LEDs, enclosure rating IP 68/IP 69K, and the latest ASIC technology from SICK. And as this high-performance sensor offers such high levels of reliability and sturdiness, long-lasting use is guaranteed.

The IQG is also extremely flexible, available in both a short body version for use in factory automation and a long body version for outdoor applications.


www.sick.de/IQG

EXCHANGE NOW AND IMMEDIATELY BENEFIT FROM THE ADVANTAGES OF THE IQG

All-round visibility
Sensor status can be seen from all directions thanks to the four corner LEDs

Flexible adjustment
The sensor head can be turned in five directions

Quick installation
Mounting takes just 2 seconds thanks to the push-lock system

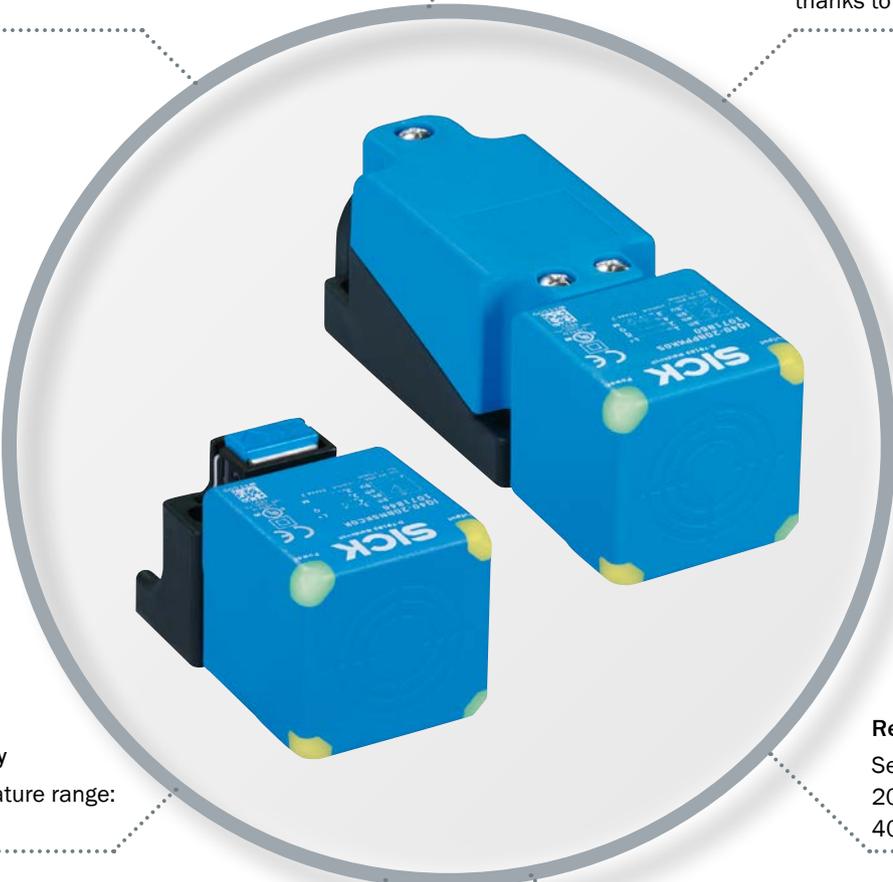

Climate flexibility
Ambient temperature range: -25 °C to 85 °C

Reliable detection
Sensing ranges: 20 mm if flush and 40 mm if non-flush

Watertight
Enclosure rating: IP 68, IP 69K

Wind and weather resistant
Can withstand UV light, aggressive media, impacts, and vibration


QUICK, RELIABLE, UNIQUE – THE PUSH-LOCK SYSTEM FROM SICK

Mounting in just two seconds with no need for tools: SICK's push-lock system makes exchanging the sensor incredibly straightforward. Plus, SICK has taken special care over the interlocking system, which ensures that the IQG stays in position and does not become detached from the bracket.



1. Quick exchange

With the IQG it all clicks into place: Simply press it into the bracket and the IQG locks in place automatically, protecting it against shock and vibration.

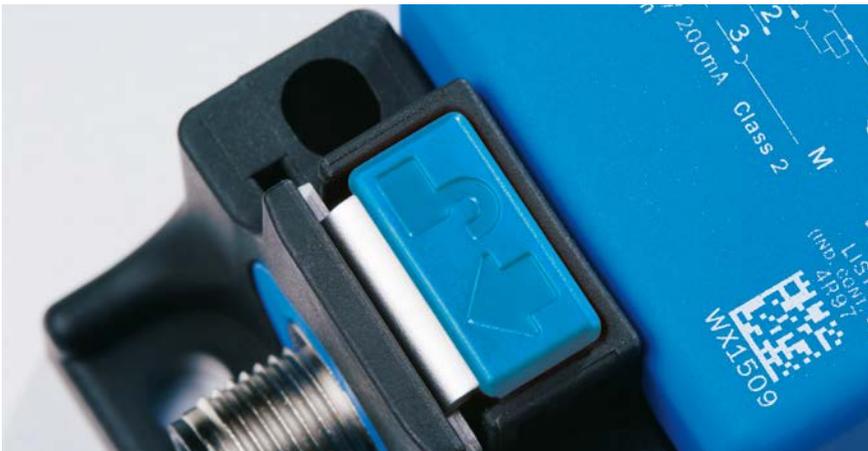

2. Safe sealing

Extra safety is provided by an additional locking mechanism, preventing the IQG from being unlocked unintentionally.



3. Rapid replacement

It doesn't get any quicker: Apply significant pressure to the push-lock button and the sensor springs out of the bracket automatically.

IQG: FLEXIBLE AND RELIABLE

The IQG shows off its strengths in a wide range of applications – both indoors and outdoors.

The automotive industry: positioning a skid conveyor

High system throughput and reliable processes are key in ensuring efficiency in modern-day car manufacturing. IQG has been specifically developed to meet these requirements.



Advantages:

- Reliable switching performance, even in harsh environments
- Easy to adapt to suit any application
- Quick to mount with no need for tools
- Sensor status can be seen from all directions regardless of the mounting position thanks to the four corner LEDs

Theme parks: presence detection on roller coasters

Roller coasters promise lots of fun for the whole family, and, of course, sun, water, and high speeds all have their part to play here. Safety requirements for the operation of roller coasters are extremely high, particularly for the sensors involved. The IQG can be relied upon for detection even in the face of these challenging conditions.



Advantages:

- High level of reliability, even in harsh environments
- Ambient temperature range: -25 °C to 85 °C
- Enclosure rating: IP 68, IP 69K

Storage and conveyor systems: positioning of an electrical overhead conveyor (OHC)

High levels of efficiency, flexibility, and reliability are requirements of modern material flow systems. The IQG overcomes challenging conditions with ease – whether it is put to use in the low-temperature sector, at dizzying heights on an electrical overhead conveyor, or on a constantly vibrating conveying line.



Advantages:

- Reliable and cost-effective sensor solution
- Quick to mount with no need for tools
- Sensor status can be seen from all directions regardless of the mounting position thanks to the four corner LEDs
- Ambient temperature range: -25 °C to 85 °C, meaning it is also suitable for use within the low-temperature sector

The automotive industry: positioning a skid conveyor

High system throughput and reliable processes are key in ensuring efficiency in modern-day car manufacturing. IQG has been specifically developed to meet these requirements.



Advantages:


- Reliable switching performance, even in harsh environments
- Easy to adapt to suit any application
- Quick to mount with no need for tools
- Sensor status can be seen from all directions regardless of the mounting position thanks to the four corner LEDs

SICK – WE UNDERSTAND

In addition to their high performance capacity, the inductive sensors by SICK also fulfill the basic conditions. The inductive sensors are characterized by their worldwide availability, the best delivery performance and an extensive portfolio – and make SICK the right partner for you.

If, despite the extensive portfolio selection, no suitable sensor is available, our customer-specific adaptations provide an even higher degree of flexibility. Our goal: the right sensor for your application – and at the right time.

Even for tricky tasks. Thanks to worldwide support in over 88 countries, SICK will work with you to always find a solution.

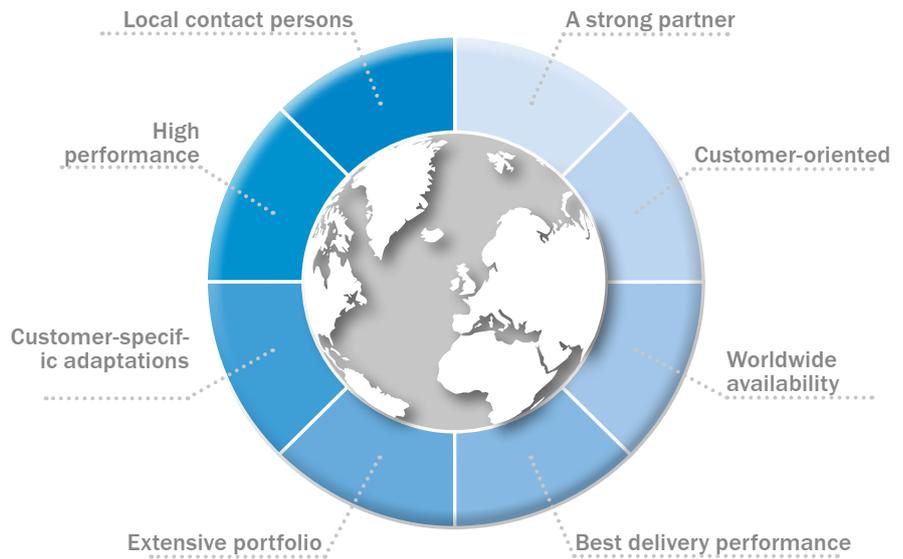

As a major player in automation technology, partnership with SICK offers you many benefits. Our goal is to continue driving innovation in the industry, even in areas neglected by others – and we want to do this across all sectors. Our global network of production plants with unified quality standards guarantees a

safe and reliable supply. Our elaborate logistics concept ensures rapid availability on site, regardless of which of our over 40,000 products you require. The individual needs of our customers are paramount to SICK. Our local sales department will advise and support you with your automation projects. Together

with our regional development and competence centers, we thus create added value for our customers.

COMPACT AND QUICK TO MOUNT – FOR USE IN HARSH ENVIRONMENTS



Product description

The new IQG inductive proximity sensor can be mounted in a matter of seconds, offers flexible adjustment options, and is easy to monitor. The innovative push-lock system enables mounting without tools in one second flat and makes replacing sensors child's play. Thanks to the rotating sensor head, the IQG can be adapted to suit a whole range of applications. The four corner LEDs enable straightforward sensor status monitor-


ing, whatever the mounting position. With state-of-the-art ASIC technology and SICK's many years of experience behind it, the proximity sensor features an extensive ambient temperature range, excellent resistance to shocks and vibrations, plus electromagnetic compatibility. Even in extremely harsh environments with severe weather conditions, it operates reliably at all times.

At a glance

- Housing design: 40 mm x 40 mm
- Increased sensing ranges: 20 mm, flush and 40 mm, non-flush
- Electrical configuration: DC 3-wire, DC 4-wire
- Ambient temperature range: -25 °C to 85 °C
- Enclosure rating: IP 68, IP 69K
- Push-lock mounting system
- Four corner LEDs
- Sensor head can be rotated in five directions

Your benefits

- Reliable, cost-effective detection
- Easy to mount in one second flat without the need for additional tools
- The four corner LEDs ensure that the sensor status can be identified from any viewing direction, whatever the mounting position
- Can be easily adapted to numerous applications
- Long sensor service life, even in harsh environments that are subjected to severe weather conditions
- Stable processes thanks to extensive sensing ranges



Additional information

Detailed technical data 9

Ordering information 10

Dimensional drawings 11

Connection diagram 12

Installation note 12

Response curve 13

Recommended accessories 13

→ www.mysick.com/en/IQG

For more information, just enter the link or scan the QR code and get direct access to technical data, CAD design models, operating instructions, software, application examples and much more.



Detailed technical data

Features

| | Short-body | Standard-body |
|---|---|---|
| Housing | Rectangular | |
| Dimensions (W x H x D) | 40 mm x 40 mm x 66 mm | 40 mm x 40 mm x 118 mm 40 mm x 40 mm x 132 mm (depending on type) |
| Sensing range S_n | | |
| Flush | 20 mm | |
| Non-flush | 40 mm | |
| Assured sensing range S_a | | |
| Flush | 16.2 mm | |
| Non-flush | 32.4 mm | |
| Installation type | Flush / non-flush (depending on type) | |
| Switching frequency | 150 Hz | |
| Output type | PNP / NPN (depending on type) | |
| Output function | NC / NO / Complementary (depending on type) | |
| Electrical wiring | DC 3-wire / DC 4-wire (depending on type) | |
| Enclosure rating | IP 67, IP 68, IP 69K | |

Mechanics/electronics

| | Short-body | Standard-body |
|--|----------------------------------|---|
| Supply voltage | 10 V DC ... 30 V DC | |
| Ripple ¹⁾ | $\leq 10 V_{pp}$ | |
| Voltage drop | $\leq 2 V$ | |
| Current consumption | $\leq 20 mA$ | |
| Time delay before availability | | |
| Flush | $\leq 50 ms$ | |
| Non-flush | $\leq 200 ms$ | |
| Hysteresis ³⁾ | 3 % ... 15 % | |
| Temperature drift (of S_p) | $\pm 10 \%$ | |
| Continuous current I_a | $\leq 200 mA$ | |
| Connection type | Male connector, M12 | Cable gland Male connector, M12 (depending on type) |
| Short-circuit protection | ✓ | |
| Reverse polarity protection | ✓ | |
| Power-up pulse protection | ✓ | |
| Shock and vibration resistance | 30 g, 11 ms / 10 ... 55 Hz, 1 mm | |
| Ambient operating temperature | -25 °C ... +85 °C | |
| Ambient storage temperature | -40 °C ... +85 °C | |
| Housing material | Plastic, PA 66 | |
| Sensing face material | Plastic, PA 66 | |
| Tightening torque, max. | 1.8 Nm | |
| Protection class | II ⁴⁾ | |
| UL-File-No. ⁴⁾ | E348498 | |

¹⁾ Of U_b .

²⁾ Without load.

³⁾ Of S_p .

⁴⁾ Reference voltage: 50 V DC.

Reduction factors

| Note | The values are reference values which may vary | |
|-----------------------------------|--|--------------|
| Stainless steel (V2A, 304) | Flush | Approx. 0.71 |
| | Non-flush | Approx. 0.8 |
| Aluminum (Al) | Flush | Approx. 0.3 |
| | Non-flush | Approx. 0.34 |
| Copper (Cu) | Flush | Approx. 0.25 |
| | Non-flush | Approx. 0.27 |
| Brass (Br) | Flush | Approx. 0.36 |
| | Non-flush | Approx. 0.38 |

Ordering information

Other models → www.mysick.com/en/IQG

Short-body

- **Connection:** connector M12, 4-pin
- **Dimensions (W x H x D):** 40 mm x 40 mm x 66 mm

| Sensing range S _n | Installation type | Electrical wiring | Output function | Output type | Connection diagram | Type | Part no. |
|---------------------------------|-------------------|-------------------|-----------------|-------------|--------------------|---------------|----------|
| 20 mm | Flush | DC 3-wire | NC | PNP | Cd-008 | IQ40-20BPOK0K | 1071844 |
| | | | | NPN | Cd-008 | IQ40-20BNOK0K | 1071848 |
| | | | NO | PNP | Cd-011 | IQ40-20BPSK0K | 1071840 |
| | | | | NPN | Cd-011 | IQ40-20BNSK0K | 1071846 |
| | | DC 4-wire | Complementary | NPN | Cd-009 | IQ40-20BNPK0K | 1071560 |
| | | | | PNP | Cd-009 | IQ40-20BPPK0K | 1071553 |
| 40 mm | Non-flush | DC 3-wire | NC | PNP | Cd-008 | IQ40-40NPOK0K | 1071852 |
| | | | | NPN | Cd-008 | IQ40-40NNOK0K | 1071856 |
| | | | NO | PNP | Cd-011 | IQ40-40NPSK0K | 1071850 |
| | | | | NPN | Cd-011 | IQ40-40NNSK0K | 1071854 |
| | | DC 4-wire | Complementary | PNP | Cd-009 | IQ40-40NPPK0K | 1071552 |
| | | | | NPN | Cd-009 | IQ40-40NNPK0K | 1071864 |

Standard-body

- **Connection:** Cable gland
- **Dimensions (W x H x D):** 40 mm x 40 mm x 118 mm

| Sensing range S _n | Installation type | Electrical wiring | Output function | Output type | Connection diagram | Type | Part no. |
|---------------------------------|-------------------|-------------------|-----------------|-------------|--------------------|---------------|----------|
| 20 mm | Flush | DC 3-wire | NC | PNP | Cd-341 | IQ40-20BPOK0S | 1071845 |
| | | | | NPN | Cd-341 | IQ40-20BNOK0S | 1071849 |
| | | | NO | PNP | Cd-342 | IQ40-20BPSK0S | 1071843 |
| | | | | NPN | Cd-342 | IQ40-20BNSK0S | 1071847 |
| | | DC 4-wire | Complementary | NPN | Cd-030 | IQ40-20BNPK0S | 1071861 |
| | | | | PNP | Cd-030 | IQ40-20BPPK0S | 1071860 |

| Sensing range S_n | Installation type | Electrical wiring | Output function | Output type | Connection diagram | Type | Part no. |
|---------------------|-------------------|-------------------|-----------------|-------------|--------------------|----------------|----------|
| 40 mm | Non-flush | DC 3-wire | NC | PNP | Cd-341 | IQ40-40NPOKKOS | 1071853 |
| | | | | NPN | Cd-341 | IQ40-40NNOKKOS | 1071857 |
| | | | NO | PNP | Cd-342 | IQ40-40NPSKKOS | 1071851 |
| | | | | NPN | Cd-342 | IQ40-40NNSKKOS | 1071855 |
| | | DC 4-wire | Complementary | PNP | Cd-030 | IQ40-40NPPKOS | 1071863 |
| | | | | NPN | Cd-030 | IQ40-40NNPKOS | 1071865 |


Standard-body

- **Connection:** connector M12, 4-pin
- **Dimensions (W x H x D):** 40 mm x 40 mm x 132 mm


| Sensing range S_n | Installation type | Electrical wiring | Output function | Output type | Connection diagram | Type | Part no. |
|---------------------|-------------------|-------------------|-----------------|-------------|--------------------|----------------|----------|
| 20 mm | Flush | DC 3-wire | NO | PNP | Cd-011 | IQ40-20BPSKCOS | 1071858 |
| | | DC 4-wire | Complementary | PNP | Cd-009 | IQ40-20BPPKCOS | 1071862 |
| 40 mm | Non-flush | DC 3-wire | NO | PNP | Cd-011 | IQ40-40NPSKCOS | 1071859 |
| | | DC 4-wire | Complementary | PNP | Cd-009 | IQ40-40NPPKCOS | 1071866 |

Dimensional drawings (Dimensions in mm (inch))


IQG Short-body housing

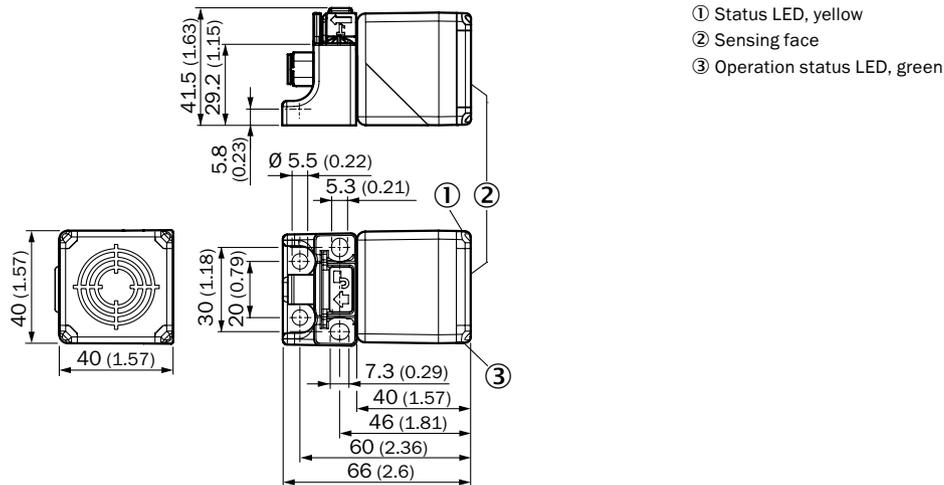

IQG Standard, cable gland

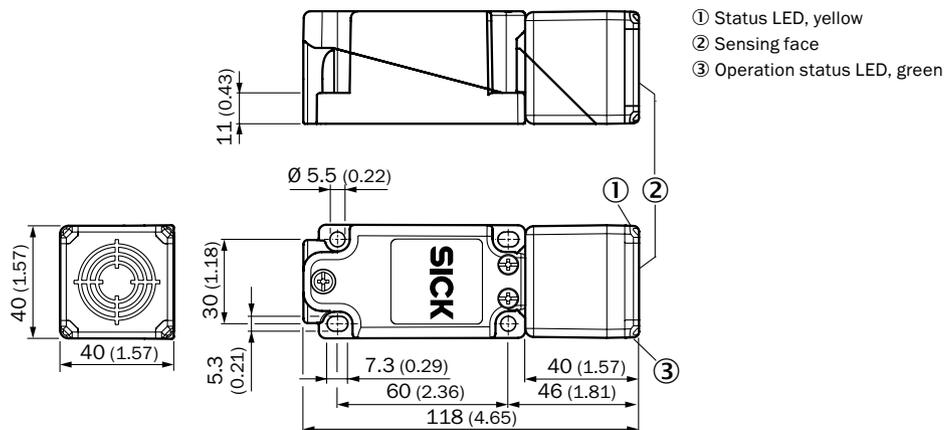


IQG Standard, connector M12

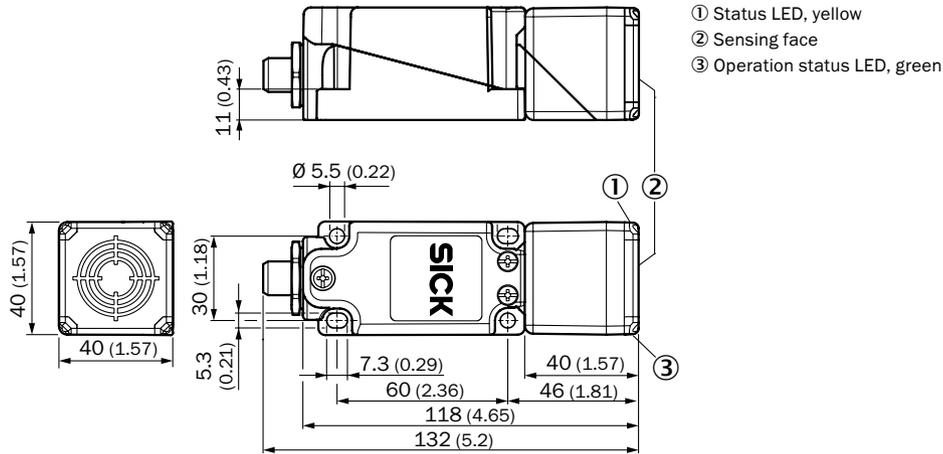


Connection diagram


Cd-009




Cd-008




Cd-011




Cd-030




Cd-341

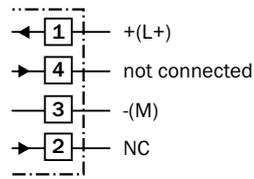

Cd-342

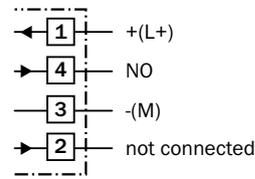


Installation note

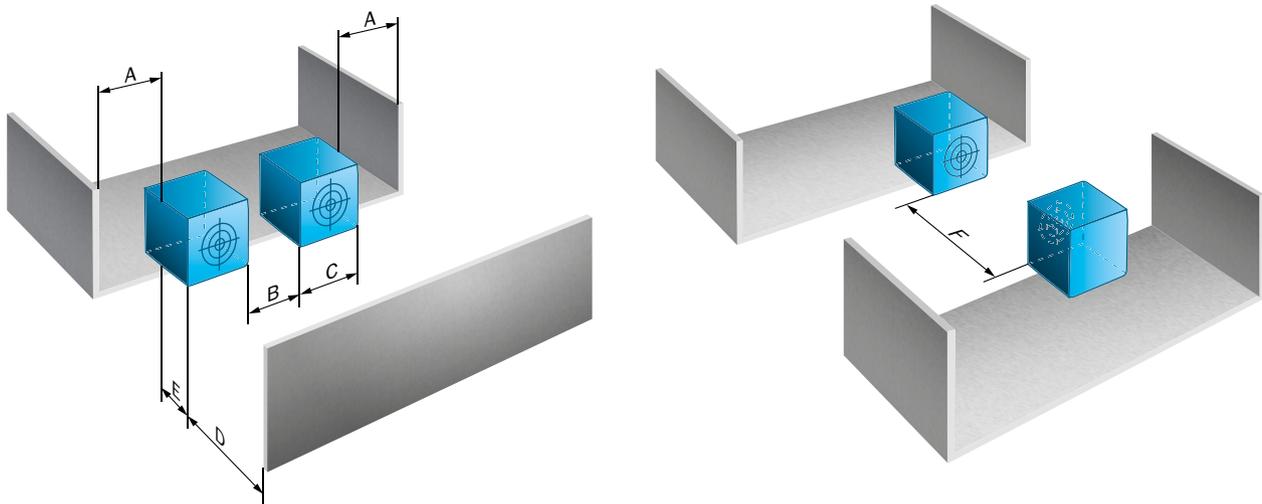


| | Installation | Sensing range S _n | A | B | C | D | E | F |
|----------------|--------------|------------------------------|-------|--------|-------|--------|-------|--------|
| IQ40-20Bxxxxxx | Flush | 20 mm | 0 mm | 40 mm | 40 mm | 60 mm | 0 mm | 70 mm |
| IQ40-40Nxxxxxx | Non-flush | 40 mm | 42 mm | 100 mm | 40 mm | 120 mm | 40 mm | 150 mm |

Response curve

IQ40-20Bxxxxxx

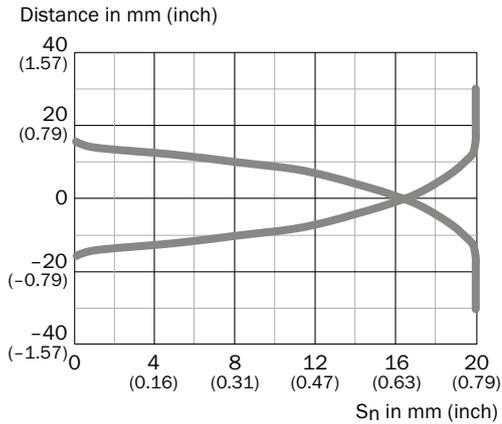

IQ40-40Nxxxxxx

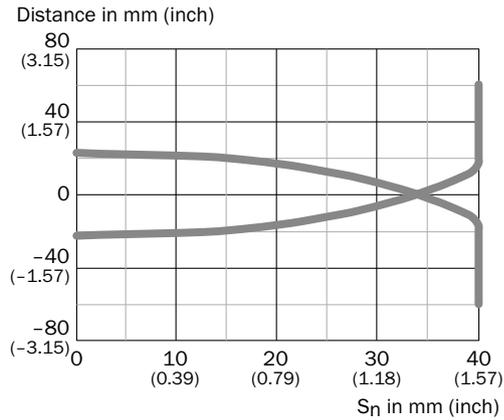

Recommended accessories

Connection systems

Female connectors (ready to assemble), M12, 4-pin

| Figure | Connection type head A | Connection type head B | Connector material | Type | Part no. |
|--------|--|------------------------|--------------------|------------|----------|
| | Female connector, M12, 4-pin, straight, unshielded | Screw-type terminals | PA | DOS-1204-G | 6007302 |
| | Female connector, M12, 4-pin, angled, unshielded | Screw-type terminals | PBT | DOS-1204-W | 6007303 |

Connecting cables with female connector M12, 4-pin, PVC, chemical resistant


- **Cable material:** PVC
- **Connector material:** TPU

| Figure | Connection type head A | Connection type head B | Connecting cable | Type | Part no. |
|--------|---|-----------------------------|------------------|---------------|----------|
| | Female connector, M12, 4-pin, straight, unshielded | Cable, open conductor heads | 2 m, 4-wire | DOL-1204-G02M | 6009382 |
| | | | 5 m, 4-wire | DOL-1204-G05M | 6009866 |
| | | | 10 m, 4-wire | DOL-1204-G10M | 6010543 |
| | Female connector, M12, 4-pin, angled, with 3 LEDs, unshielded | Cable, open conductor heads | 2 m, 4-wire | DOL-1204-L02M | 6027945 |
| | | | 5 m, 4-wire | DOL-1204-L05M | 6027944 |
| | | | 10 m, 4-wire | DOL-1204-L10M | 6027946 |
| | Female connector, M12, 4-pin, angled, unshielded | Cable, open conductor heads | 2 m, 4-wire | DOL-1204-W02M | 6009383 |
| | | | 5 m, 4-wire | DOL-1204-W05M | 6009867 |
| | | | 10 m, 4-wire | DOL-1204-W10M | 6010541 |


Dimensional drawings for accessories (Dimensions in mm (inch))

Plug connectors and cables


DOL-1204-GxxM

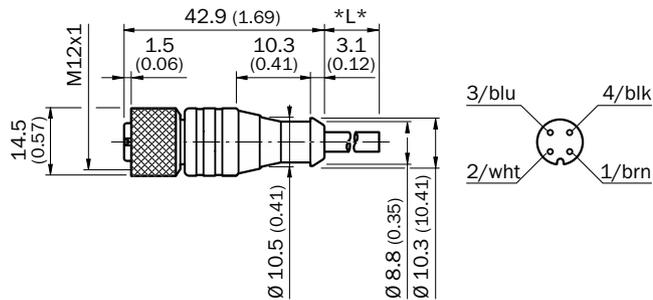


DOL-1204-LxxM

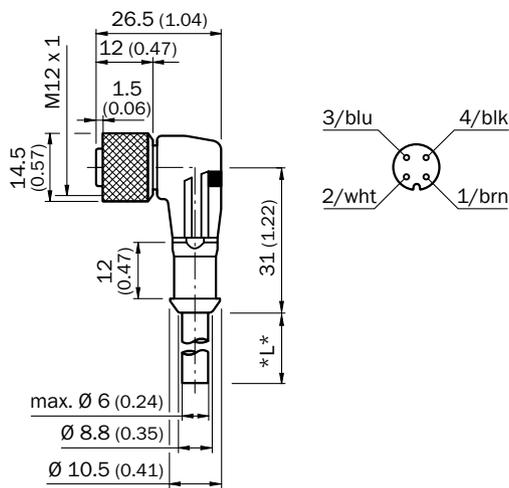


DOL-1204-WxxM

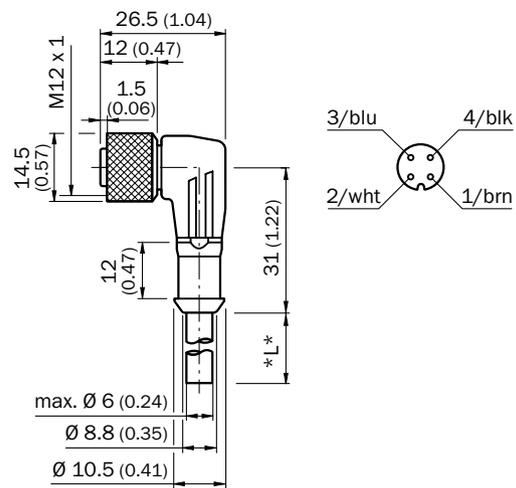

DOS-1204-G

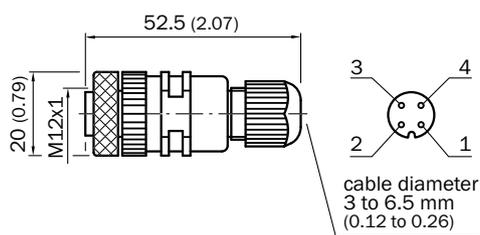


DOS-1204-W

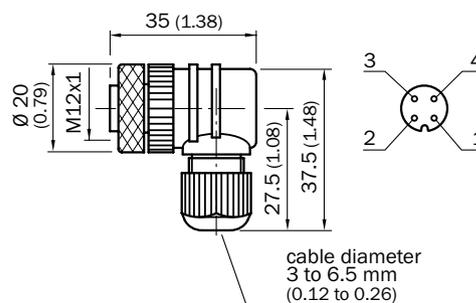


REGISTER AT WWW.SICK.COM TODAY AND ENJOY ALL THE BENEFITS

- ✔ Select products, accessories, documentation and software quickly and easily.
- ✔ Create, save and share personalized wish lists.
- ✔ View the net price and date of delivery for every product.
- ✔ Requests for quotation, ordering and delivery tracking made easy.
- ✔ Overview of all quotations and orders.
- ✔ Direct ordering: submit even very complex orders in moments.
- ✔ View the status of quotations and orders at any time. Receive e-mail notifications of status changes.
- ✔ Easily repeat previous orders.
- ✔ Conveniently export quotations and orders to work with your systems.

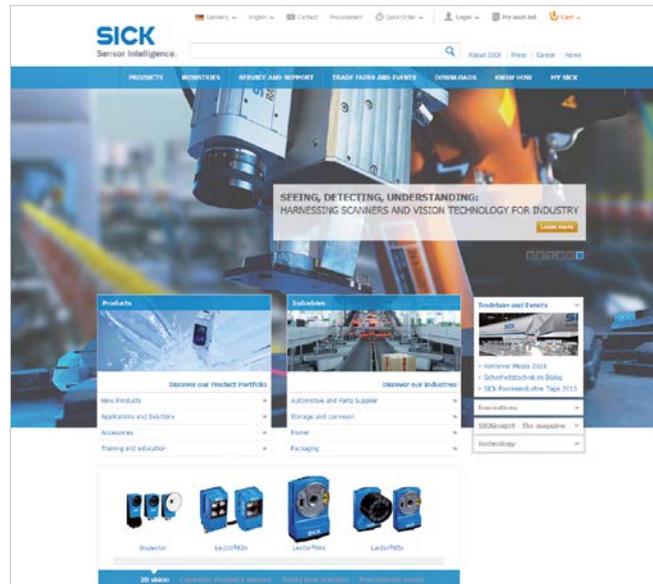

SERVICES FOR MACHINES AND SYSTEMS: SICK LifeTime Services

Our comprehensive and versatile LifeTime Services are the perfect addition to the comprehensive range of products from SICK. The services range from product-independent consulting to traditional product services.

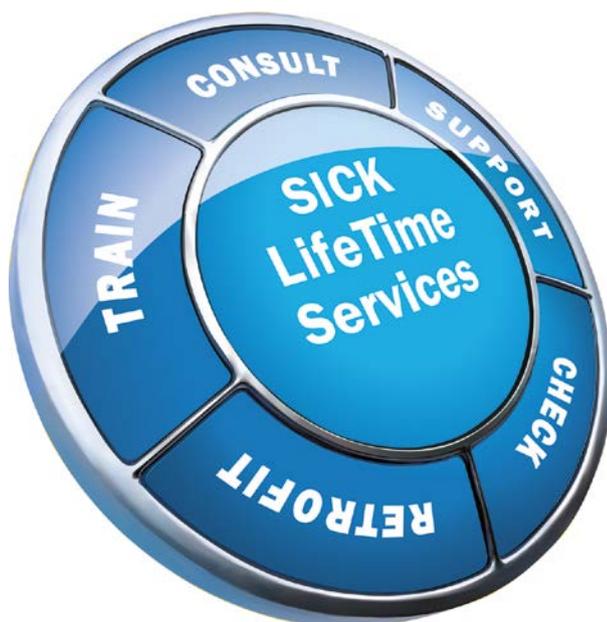

- 
Consulting and design
 Safe and professional
- 
Product and system support
 Reliable, fast and on-site
- 
Verification and optimization
 Safe and regularly inspected
- 
Upgrade and retrofits
 Easy, safe and economical
- 
Training and education
 Practical, focused and professional

SICK AT A GLANCE

SICK is a leading manufacturer of intelligent sensors and sensor solutions for industrial applications. With more than 8,000 employees and over 50 subsidiaries and equity investments as well as numerous agencies worldwide, we are always close to our customers. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in various industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services round out our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

Worldwide presence:

Australia, Austria, Belgium, Brazil, Canada, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, Hong Kong, India, Israel, Italy, Japan, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Romania, Russia, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Vietnam.

Detailed addresses and further locations → www.sick.com